



How to Associate Reed KumoSensor




Step 1. Reed KumoSensors are shipped with battery installed; but to reduce waste, there is no battery insulation tape to pull out.

The matching magnet is placed in the opposite orientation and on the **right** side in package.

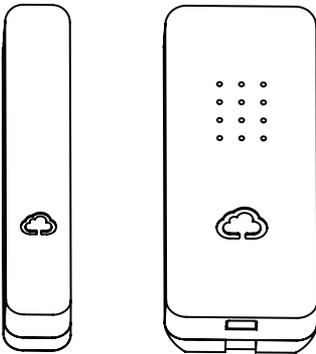

Step 2. Rotate the magnet so that the logo are aligned in the same orientation, place it on the **left** side of the main sensor element.

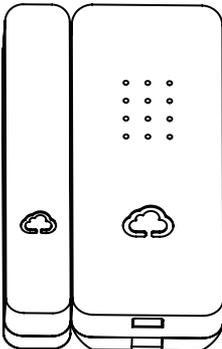

Step 3. Move the magnet in contact with the Reed KumoSensor and then away. A LED light should start flashing for about 2 minutes. Search and associate during that time.